

SPD 265 C+ SPD 266 C+



1,2 t




1,8 - 6,0 m


kW

3 kW / 4,1 Hp

				
	SPD265: 1700 kg SPD266: 1700 kg	SPD265: - SPD266: 100 Kg	2T-D7: 10kg	-
 L x W x H	2500x800x1750 mm	 1,5 km/h	 20°	
 MAX	1400 kg	 0,34 kg/cm ²		
	24V-DC SEP n°4 6V-420Ah			
 AUX	4kW 400V-AC 3F		50 kg	
Telescopic Boom: 1 base and 4 telescopic sections high-tensile structural steel. All sections synchronized and full power. Braccio Telescopico: 1 braccio principale e 4 telescopici in acciaio strutturale ad alta resistenza. Sfilo completamente idraulico e sincronizzato. Teleskopausleger: 1 Hauptausleger + 4 Hochwiderstand Stahl Teleskopausleger. Voll hydraulischer und teleskopierbarer Ausleger. Pluma Telescópica: 1 pluma principal y 4 telescópicas en acero de alta resistencia. Elementos sincronizados e hidráulicos. Flèche Télescopique: 1 flèche principale et 4 télescopiques en acier à haute résistance. Éléments synchronisés et hydrauliques.				
	220° 1,5 rpm		-9°/76° 15"	
	1,8-6,0 m 23"		600 kg - 60 m - Ø7 mm 16 m/min.	

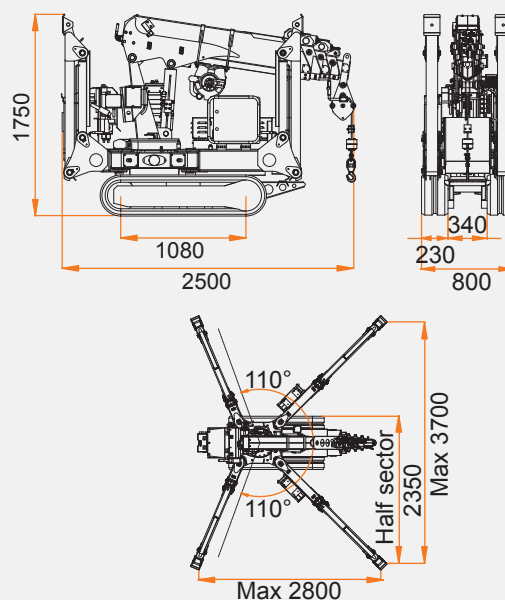

MAIN BOOM

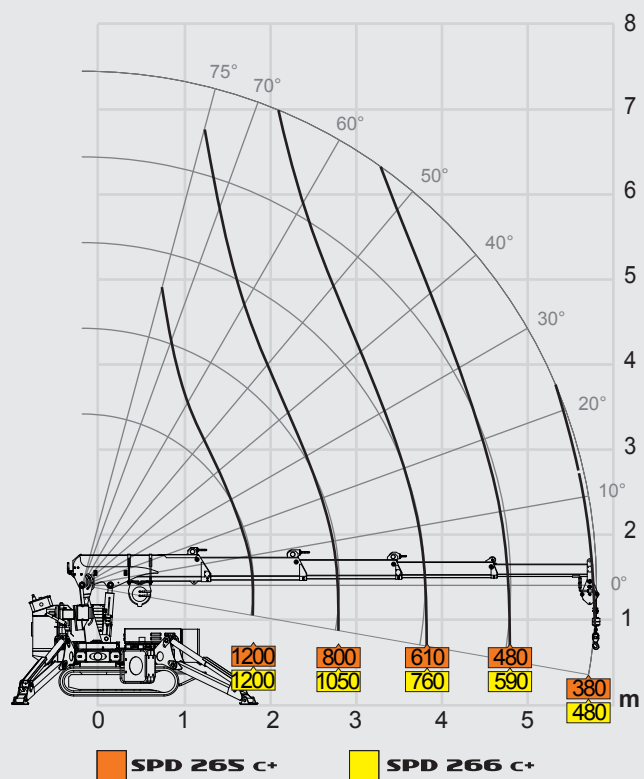

MV300

